








OUR STRENGTHS

- Extrusion Technology:
 Kraussmaffie (Austria) and Cincinnati
 (Germany)
- 100+ Fabrication units across INDIA, BHUTAN and DUBAI
- 70+ high grade uPVC profiles for windows, Doors and pre-fab cabins
- Pioneer in WPC (Wood polymer composite) multicavity extrusion door in INDIA
- Inhouse manufacturing of
- Co-ex TPE rubber gasket
- GI reinforcements
- Profile foiling machine
- Yashpoly window software
- Arch bending machine



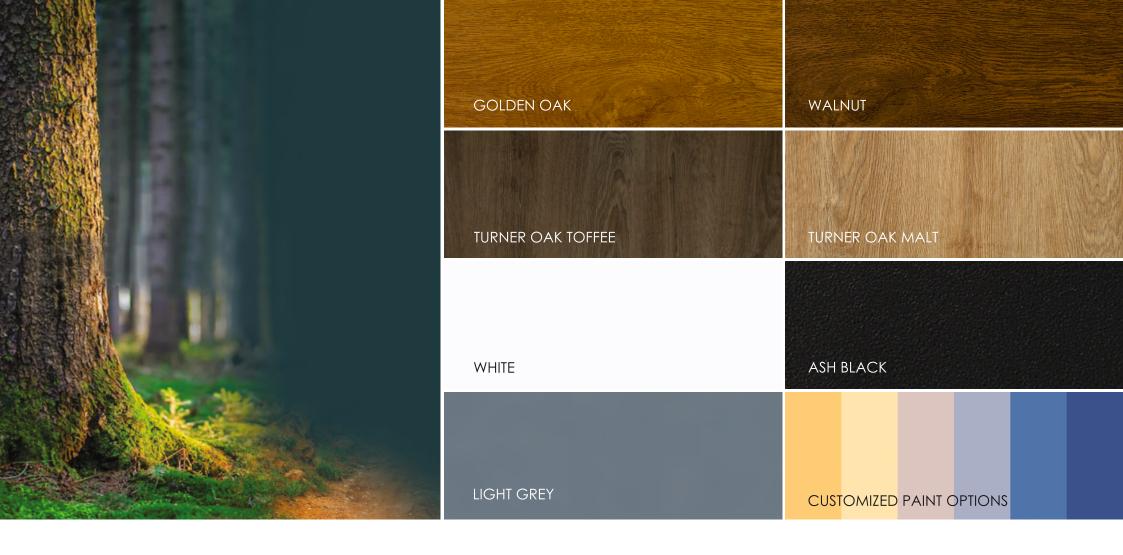


RANGE OF COLORS



STUDIO

uPVC PROFILES | WINDOWS | DOORS | PRE-FABS | WPC DOORS







SLIDING WINDOW SERIES 60 mm





- Application Recommended for commercial & budget housing Minimum Windows Seal: 80mm
- Features Compatible with sash 61mm and super sash 85mm
- Lock 61mm sash: Touch Lock & Cresent Lock 85mm Super Sash : Touch Lock & Multi locking system
- Aluminium coping track rail
- Bug Mesh provision not available



SLIDING WINDOW SERIES 88 mm







- Features Compatible with sash 61 mm and super sash 85mm
- Lock 61 mm sash: Touch Lock & Crescent Lock

85mm Super Sash: Touch Lock & Multi locking system Aluminium caping track rail Bug Mesh available with 42mm & 58mm screen sash









SLIDING DOOR SERIES 108 mm







Application

- Structural design considered for high wind load resistance in highrise buildings
- Minimum Window Seal: 150 mm for 3 Track 180mm for track + addon track
- Glass: upto 20mm
- Features Compatible with super sash 85mm.
- Lock: Touch Lock & Multi locking system.
- Bug Mesh 61 mm & 85mm screen sash
- uPVC mullion for glass as well as bug mesh Attachable addon track for mesh shutter







SLIDING WINDOW SERIES 108 mm





- Structural design considered for high wind load resistance in highrise buildings.
- Minimun Window Seal: 150 mm
- Glass: upto 20mm

Features


Compatible with Sash 61 mm, 72mm and super sash 85mm

■ Lock:

61mm sash: Touch Lock & Crescent Lock 85mm super sash: Touch Lock & Multi locking system

■ Bug Mesh available with 61 mm & 85mm screen sash








CASEMENT WINDOW SERIES 60 mm



- Application
- Used for Combination louvers and Fix Window frames
- Minimum Window Seal: 80mm
- Glass: upto 30 mm
- Glass with Integrated blinds can be installed in window frame
- Features Compatible with Openable sash 75mm
- Lock: Single or Multi locking system
- Special Integrated grill and bug Mesh available with 61 mm screen sash








CASEMENT DOOR SERIES 60 mm





- Application:
- Designed to sustain extreme wind load conditions
- Minimum Window Seal: 80mm
- Glass: upto 30 mm
- Glass with Integrated blinds can be installed in window frame
- Features Compatible with Openable sash 110mm
- Lock: Multi locking system.








SLIDING WINDOW / DOOR SERIES 66 mm



- Application Recommended for commercial & bigger sized openings. Minimum windows seal: 80 mm.
- Features Compatible with sash 75x45mm and sash 90x45mm
- Lock Touch lock. Super sash: Multi locking system Shutter height upto 10 ft.
- Aluminium capping track rail
- Bug mesh provision not available







SLIDING DOORS SERIES 118 mm

- Application
- Structural design considered for high wind load resistance in highrise buildings
- Minimum Window Seal: 150 mm for 3 Track 180mm for track + addon track
- Glass: upto 35mm
- Features Compatible with super sash 90mm
- Shutter height up to 10 ft.
- Lock: Touch Lock & Multi locking system.
- Bug Mesh 72 mm & 90mm screen sash
- uPVC mullion for glass as well as bug mesh Attachable addon track for mesh shutter






- uPVC Partition / Ceiling:
- uPVC multi walled panels of 20 X 155 X 1.2 mm and 355 X20 X 1.2mm fixed with hidden screwing method on MS pipe structure interlocked with tongue and groove system
- Nutbolt system available depending on the site requirements
- Highly recommended for partitions and ceilings in Offices, Hospitals and Factories etc
- Cost saving, easy and less time consuming installation process as compared to other conventional systems
- uPVC Doors and Windows can be integrated based on the design
- Chemical and Fire retardant properties make this product highly recommendable for use in pharma, food and other allied industries
- 100% Termite free and Weather resistant

UPVC PROFLE 20MM

UPVC PROFLE 20MM

PARTITION & CEILING

























[■] Farm house / Resort rooms ■ Site offices ■ Tiny home

[■] Security cabin ■ Toilet blocks ■ Watchman cabins & many more

OPEN YOUR DOORS TO THE FUTURE



DISCOVER
THE PERFECT
COMPOSITE
DOOR FOR
YOUR HOME

WPC DOORS





Available Sizes -700mm X 2100, 800mm X 2100 900mm X 2100 Overall thickness 37mm.



uPVC & WPC DOORS







■ WPC Doors:

- 37mm multiwall extruded door with looks of wood and merits of PVC
- Recommended for premium villas and housing projects
- Hinge side with specially designed GI Reinforcement for better screwing and strength
- Available in Melamine polish of different shades
- Laminates and veneer can be pasted
- 100%Termite free and Weather resistant
- No Expansion or contraction due to weather changes

















Sliding

Aesthetic & Stylish sound proof energy efficient weather proof double gasket system available 2track, 2.5 track, 3 track & mono reel slider

Slide & Fold

Aesthetic & Stylish sound proof weather proof European standards less maintenance wide opening in narrow space

Casement

Contemporary design with durability out-open, inside open and parallel open energy efficient handles extreme weather conditions sound proof


Tilt & turn

Easy to clean and perfect for ventilation secured and aesthetically appealing resistant to corrosion and termite proof fitted with superior quality and well insulated strong glass panels synthetic weather seal

Ventilator

Fixed Louvers | Adjustable Louvers | Louvers with Exhaust



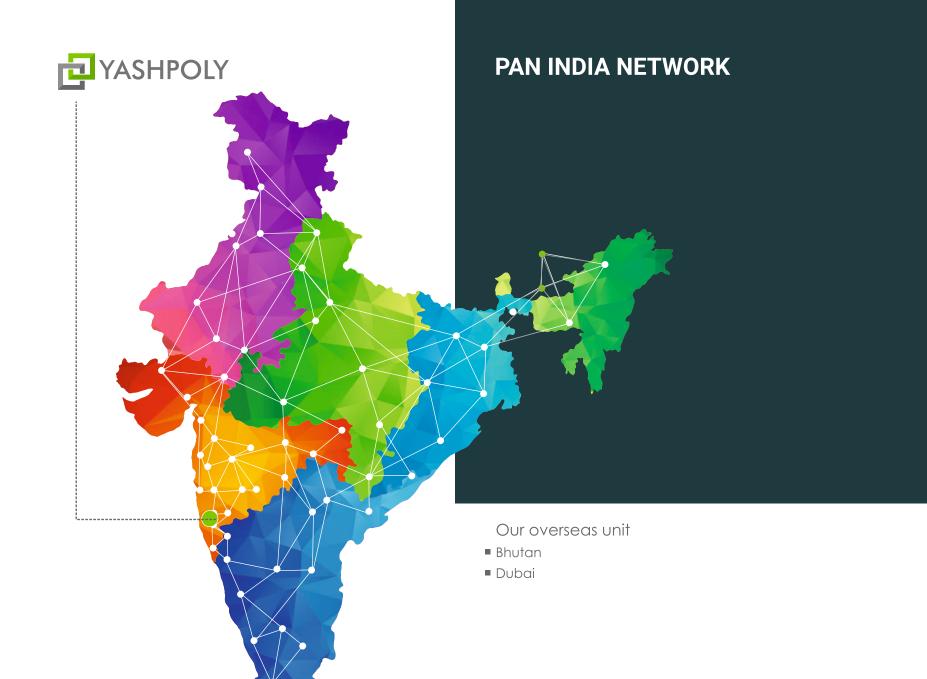





YASHASHRI POLYEXTRUSION PVT LTD

Gat No. 436/C/2/3, Shahu Industrial Estate, JAYSINGPUR - 416 101. Dist. Kolhapur (MH) INDIA

02322 221622 Cell 9850981620 E-mail : yashpolyindia@gmail.com

www.yashpolyprofiles.com